


TDGC2 & TSGC2 单相 三相调压器
 TDGC2 & TSGC2 VOLTAGE REGULATOR



TDGC₂-1KVA



TDGC₂-2KVA

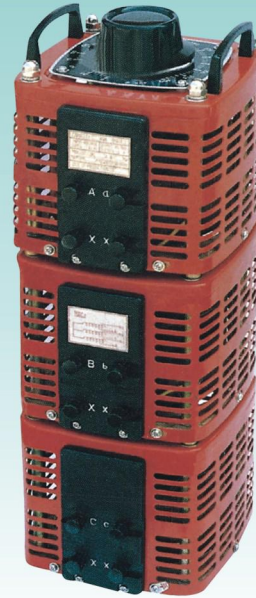

TSGC₂-10KVA

Application

The product is special auto transformer which is connected in different forms. Its output voltage can be regulated smoothly and continuously from zero to the maximum value. The provision of an indication meter is made for the models TDGC2 0.2,0.25,0.5KVA. All models find popular application in industries, agriculture and scientific researches, and are particularly suited to serve as ancillary facilities for such equipment as various machine tools, transistor curve tracers, projecting TV sets, and analytical instruments in petroleum industry, etc.

Output Current

Model	Phase	Frequency(Hz)	Input voltage(V)	Output voltage (V)	Max. Output current (A)	Shape
TDGC ₂ -0.2KVA	1	50/60	110/220	0-250	0.36/0.8	Round
TDGC ₂ -0.25KVA					0.4/1	
TDGC ₂ -0.5KVA					0.88/2	
TDGC ₂ -0.5KVA					0.88/2	
TDGC ₂ -1KVA					1.6/4	
TDGC ₂ -2KVA					3.2/8	
TDGC ₂ -3KVA					4.8/12	Round
TDGC ₂ -5KVA					8/20	Octagon
TDGC ₂ -10KVA					16/40	
TDGC ₂ -15KVA					24/60	
TDGC ₂ -20KVA					80	
TSGC ₂ -3KVA					1.6/4	
TSGC ₂ -6KVA	3.2/8					
TSGC ₂ -10KVA	5.4/13.4	Octagon				
TSGC ₂ -15KVA	20					
TSGC ₂ -20KVA	28					
TSGC ₂ -30KVA	40					